
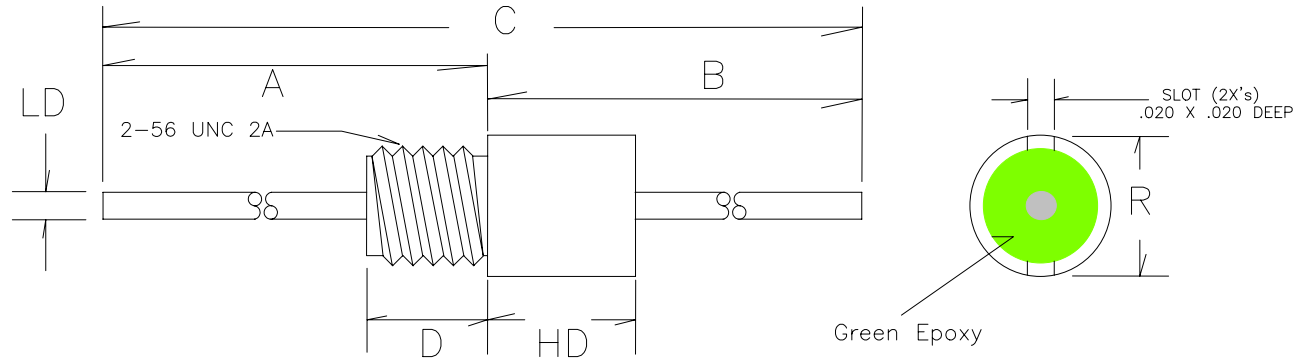


2-56 UNC-2A THREADED GROUND POINTS

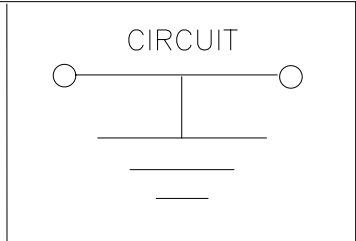

EMI P/N	FINISH	A		B		C		D		HD		R		LD	
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
B2GND	Gold	.270"	6.86	.270"	6.86	.540"	(13.71)	.090"	(2.29)	.110"	(2.79)	.105"	(2.67)	.020"	(.51)
B2GND24	Gold	.270"	6.86	.270"	6.86	.540"	(13.71)	.090"	(2.29)	.110"	(2.79)	.105"	(2.67)	.024"	(.61)

MATERIAL AND FINISH:

CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1

DIMENSION TOLERANCE:

CASE LENGTH: $\pm .010"$ (.250mm)
 HEAD DIAMETER (R): $\pm .003"$ (.076mm)
 LEAD LENGTH: $\pm .030"$ (.762mm)
 LEAD DIAMETER: $\pm .002"$ (.051mm)

LIMITS:

OPERATING TEMP: -55°C to $+125^{\circ}\text{C}$
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

DC CURRENT: 5 AMPS

- * RoHS Compliant
- * ISO 9001:2008 Registered

EMI FILTER COMPANY
 12750 59th WAY NORTH
 CLEARWATER, FLORIDA 33760

(727) 585-7990
 (727) 586-5138 Fax

www.emifiltercompany.com

EMI PART NUMBER: 2-56 SERIES
 GROUND POINTS

FSCM NO.

OR9L0

DWG NO.

2-56GNDs REVC

REV

C

SCALE:
 NTS