
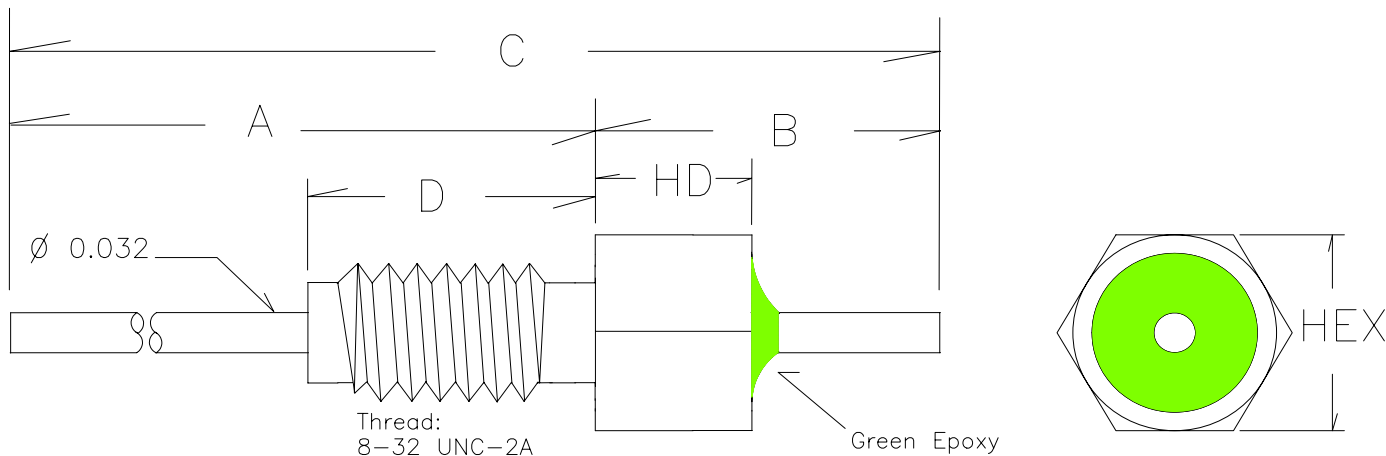


8-32 UNC-2A THREADED GROUND POINTS

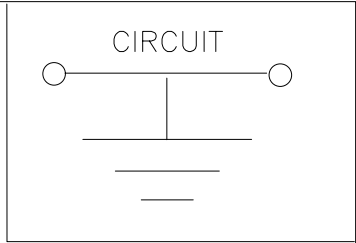

EMI P/N	FINISH	A		B		C		D		HD		HEX/R	
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
B7GND	Silver	.450"	11.43	.312"	7.92	.762"	(15.00)	.140"	(3.55)	.075"	(1.90)	.187"	(4.75) Hex
B8GND	Silver	.578"	14.68	.312"	7.92	.890"	(12.60)	.266"	(6.75)	.093"	(2.36)	.187"	(4.75) Hex

MATERIAL AND FINISH:

CASE: C12L14 CRS
 LEAD: Copper (1/2 Hard)
 FINISH: Silver per QQ-S-365

DC CURRENT: 10 AMPS

DIMENSION TOLERANCE:

CASE LENGTH: +/- .010" (.250mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)

OPERATING TEMP: -55° C to +125° C

INSTALLATION TEMP: N/A

MAXIMUM MOUNTING TORQUE: 6.0 in*lbs

*RoHS Compliant * ISO 9001:2008 Registered*

EMI FILTER COMPANY 12750 59th WAY NORTH CLEARWATER, FLORIDA 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		EMI PART NUMBER: 8-32 SERIES GROUND POINTS	
FSCM NO.	DWG NO.	REV	
OR9L0	8-32GNDs REVC	C	
SCALE:			
NTS			

