
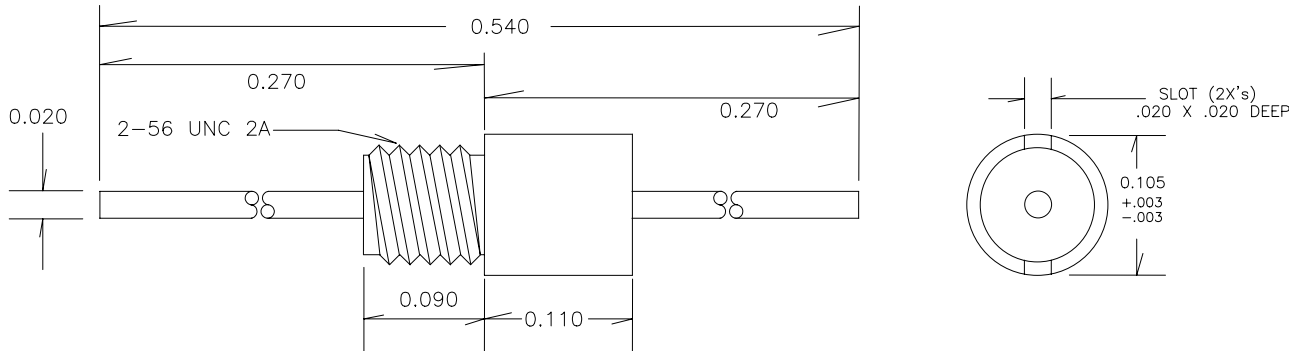


B2 SERIES 2-56 THREAD NON-HERMETIC FEED-THRU



- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
	B2C000D	0	NONE	200	5					
	B2C050D	5	2 ORANGE	200	5					
	B2C100D	10	VIOLET	200	5				5	20
	B2C250D	25	BLUE	200	5				10	25
	B2C101D	100	GREEN	200	5			3	20	28
	B2C501D	500	BROWN	200	5			15	35	40
	B2C102B	1000	WHITE	100	5		5	20	35	45
	B2C122B	1200	WHITE	100	5		5	20	35	45
	B2C152B	1500	WHITE	100	5		7	23	37	47
	B2C272B	2700	RED	100	5	5	10	25	40	50
	B2C502B	5000	YELLOW	100	5	5	15	30	45	55
	B2C103A	10,000	2 WHITE	50	5	6	21	35	50	60

ELECTRICAL

PHYSICAL

IDENTIFICATION & LIMITS

CAPACITANCE TOLERANCE:
+100/-0%

DISSIPATION FACTOR: 3.5% MAX.
INSULATION RESISTANCE:

25° C=10,000 Mohm Min.
125° C=1,000 Mohm Min.

DIELECTRIC STRENGTH (DWV):
250% of WVDC (5 seconds)

TEMPERATURE CHARACTERISTIC:
X7R or better

DIMENSION TOLERANCE:

CASE LENGTH: +/- .005" (.125mm)

LEAD LENGTH: +/- .030" (.762mm)

LEAD DIAMETER: +/- .002" (.051mm)

MATERIAL AND FINISH:

CASE/FINISH: Brass/Gold

LEAD/FINISH: Brass/Gold

Suitable For Wire Bond

Per MIL-G-45204,

Type III, Grade A, Class 1

VENDOR:

EMI FILTER COMPANY

12750 59th Way N.

Clearwater, FL 33760

(727) 585-7990

(727) 586-5138 FAX

www.emifiltercompany.com

*MARKING: NO MARKING STANDARD.

Color dot marking option available.



OPERATING TEMP: -55° C to +125° C

MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

FILTERS, EMI, MINIATURE,
SOLDER-IN STYLE, STANDARD SEAL

FSCM NO.	DWG NO.	REV
	B2Cs REV C	C

B2C000D
2-56 THREAD NON-HERMETIC
"0"pF Cap. FEED-THRU

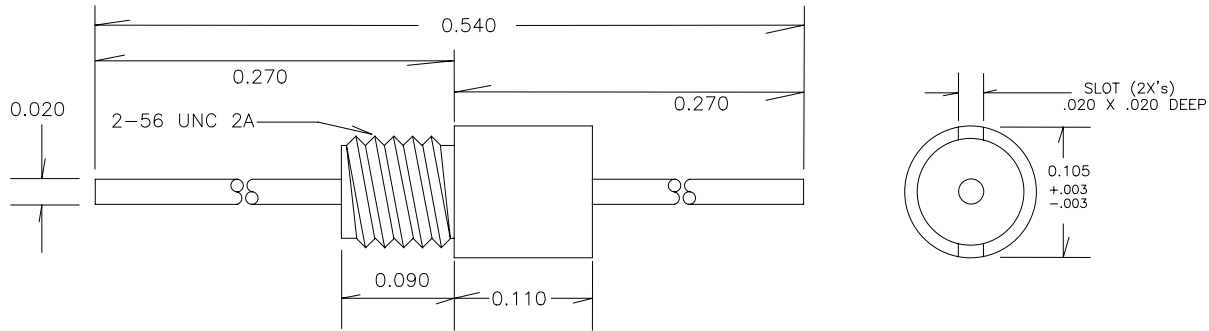

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C000D		0	NONE	200	5	-	-	-	-	-

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY	
FSCM NO.	DWG NO.	REV	
	B2C000D REV C	C	

B2C050D
2-56 THREAD NON-HERMETIC
5pF Cap. FEED-THRU

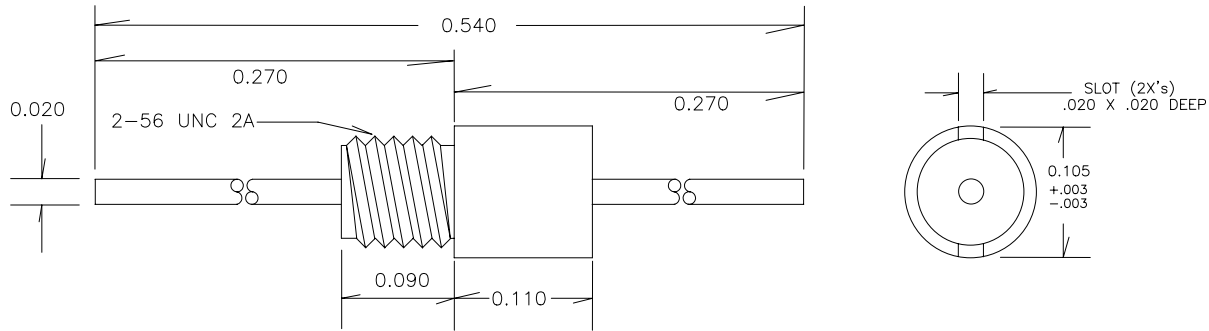

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C050D		5	2 ORANGE	200	5	-	-	-	-	-

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	B2C050D REV C		REV C

B2C100D
 2-56 THREAD NON-HERMETIC
 10pF Cap. FEED-THRU

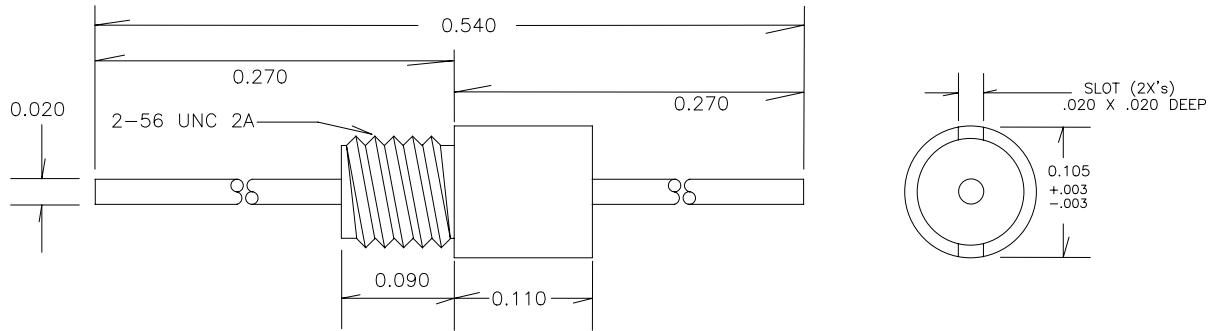

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C100D		10	VIOLET	200	5	-	-	-	5	20

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com			FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.		DWG NO.		REV	
		B2C100D REV C		C	

B2C250D
2-56 THREAD NON-HERMETIC
25pF Cap. FEED-THRU

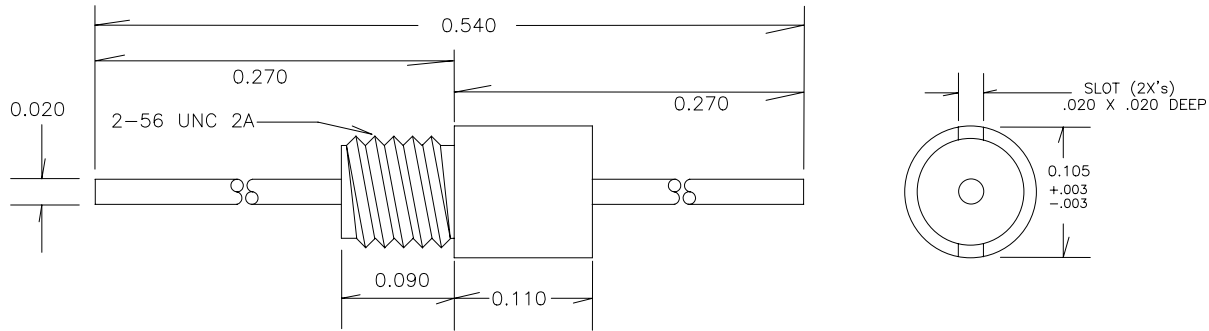

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C250D		25	BLUE	200	5	-	-	-	10	25

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com			FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.		DWG NO.		REV	
		B2C250D REV C		C	

B2C101D
2-56 THREAD NON-HERMETIC
100pF Cap. FEED-THRU

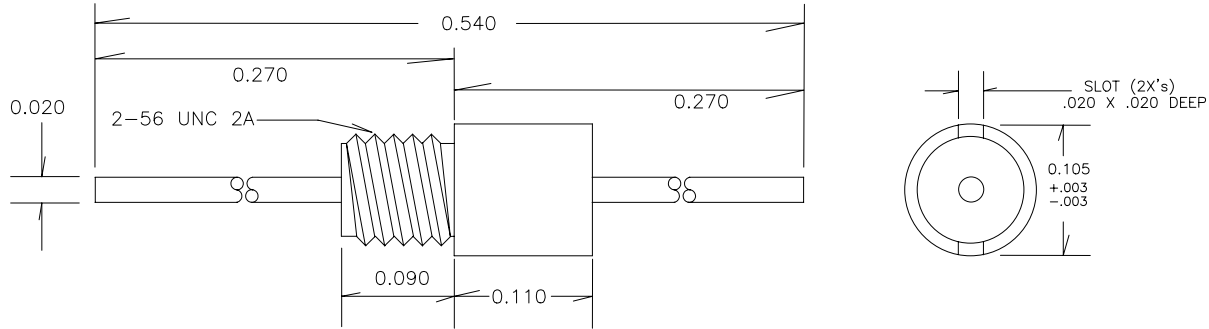

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C101D		100	GREEN	200	5	-	-	3	20	28

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	REV		
	B2C101D REV C	C		

B2C501D
2-56 THREAD NON-HERMETIC
500pF Cap. FEED-THRU

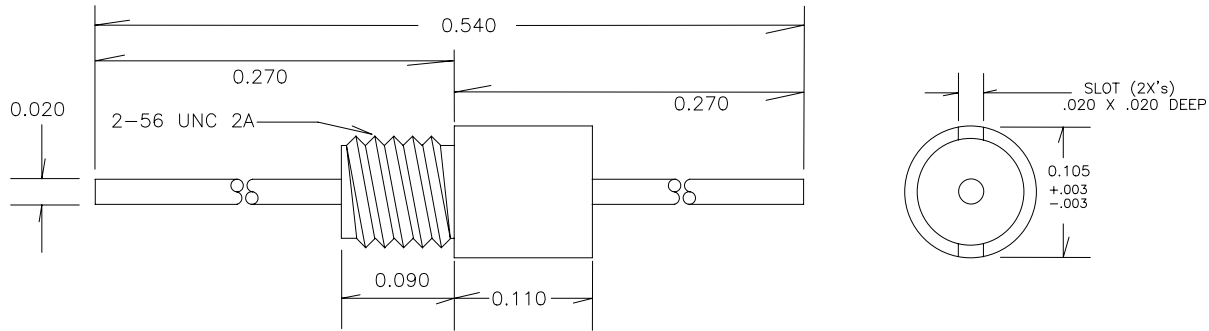

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C501D		500	BROWN	200	5	-	-	15	35	40

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760		FILTER, EMI, MINIATURE, 2-56 THREADED BODY	
(727) 585-7990	FSCM NO.	DWG NO. B2C501D REVC	REV C
(727) 586-5138 Fax			
www.emifiltercompany.com			

B2C102B
2-56 THREAD NON-HERMETIC
1,000pF Cap. FEED-THRU

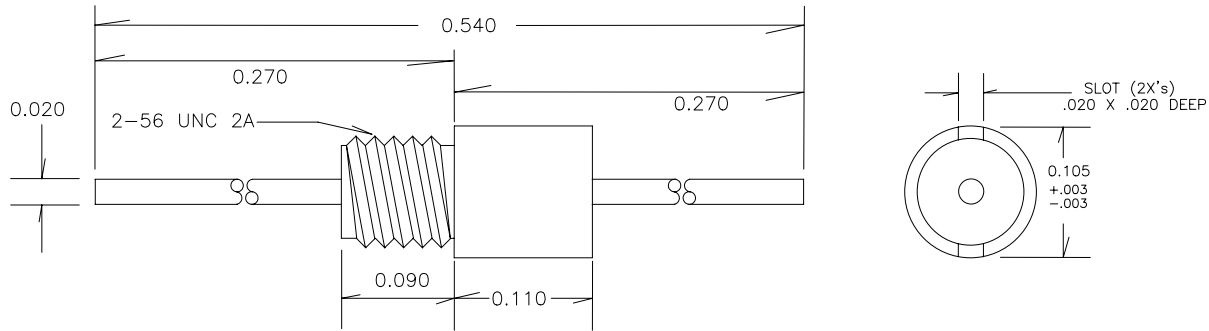

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C102B		1,000	WHITE	100	5	-	5	20	35	45

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	REV		
	B2C102B REV C	C		

B2C122B
2-56 THREAD NON-HERMETIC
1,200pF Cap. FEED-THRU

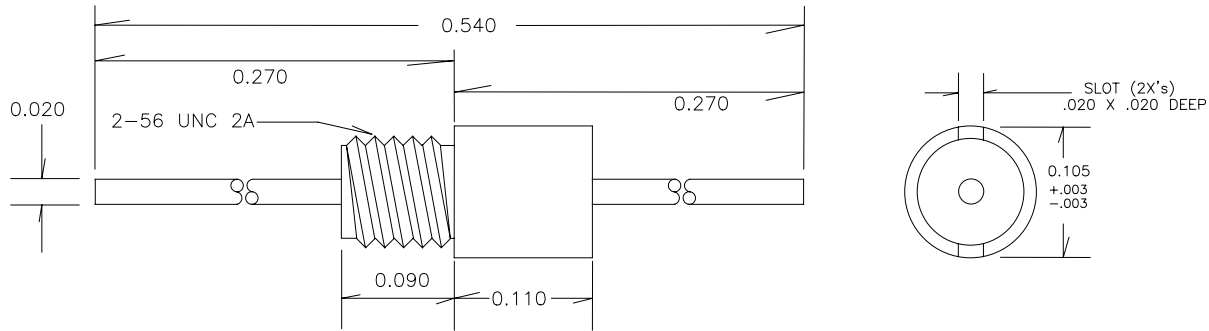

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C122B		1,200	WHITE	100	5	-	5	20	35	45

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	B2C122B REV C		REV C

B2C152B
2-56 THREAD NON-HERMETIC
1,500pF Cap. FEED-THRU

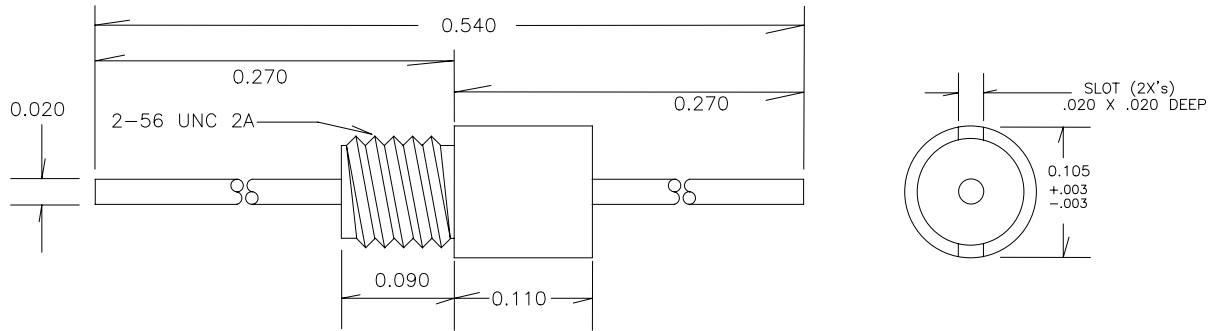

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C152B		1,500	WHITE	100	5	-	7	23	37	47

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY	
FSCM NO.	DWG NO.	REV	
	B2C152B REV C	C	

B2C272B
2-56 THREAD NON-HERMETIC
2,700pF Cap. FEED-THRU

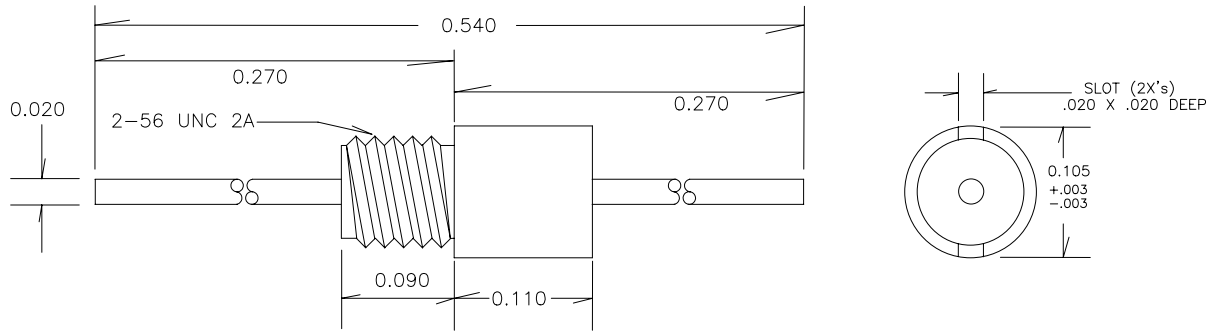

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C272B		2,700	RED	100	5	5	10	25	40	50

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	B2C272B REV C		REV C

B2C502B
2-56 THREAD NON-HERMETIC
5,000pF Cap. FEED-THRU

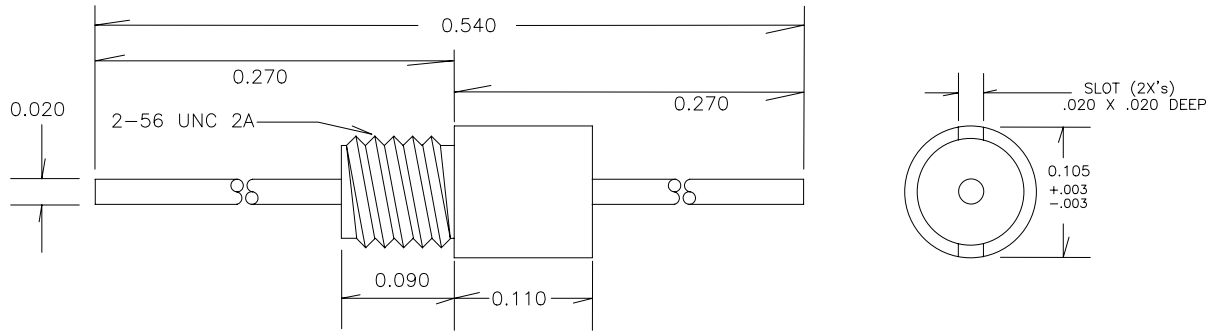

- * RoHS Compliant
- * ISO 9001:2000 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C502B		5,000	YELLOW	100	5	5	15	30	45	55

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25 °C=1000 MΩμF Min.
 125 °C=100 MΩμF Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1



IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	B2C502B REV C		REV C

B2C103A
 2-56 THREAD NON-HERMETIC
 10,000pF Cap. FEED-THRU

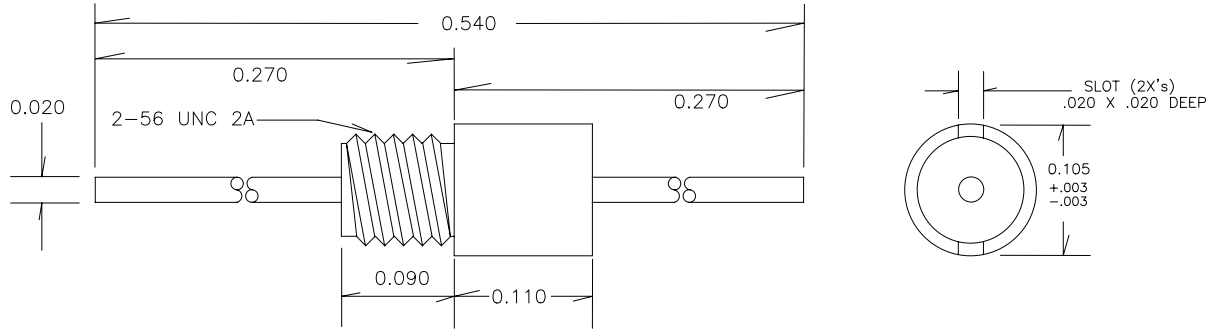

- * RoHS Compliant
- * ISO 9001:2008 Registered
- * Discoidal Capacitor Construction

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)*	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
B2C103A		10,000	2 WHITE	50	5	6	21	35	50	60

ELECTRICAL

CAPACITANCE TOLERANCE: +100/-0%
 DISSIPATION FACTOR: 3.5% MAX.
 INSULATION RESISTANCE:
 25° C=10,000 Mohm Min.
 125° C=1,000 Mohm Min.
 DIELECTRIC STRENGTH (DWV):
 250% of WVDC (5 seconds)
 TEMPERATURE CHARACTERISTIC:
 X7R or better

PHYSICAL

DIMENSION TOLERANCE:
 CASE LENGTH: +/- .005" (.123mm)
 LEAD LENGTH: +/- .030" (.762mm)
 LEAD DIAMETER: +/- .002" (.051mm)
 MATERIAL AND FINISH:
 CASE: Brass CASE FINISH: Gold
 LEAD: Brass, 3/4 Hard
 LEAD FINISH: Gold, Suitable For Wire Bond
 Per MIL-G-45204, Type III, Grade A, Class 1

IDENTIFICATION & LIMITS

*MARKING: NO MARKING STANDARD.
 Color dot marking option available.
 OPERATING TEMP: -55° C to +125° C
 INSTALLATION TEMP: N/A
 MAXIMUM MOUNTING TORQUE: 1.0 in*lbs

NOTE
 For a .024" diameter lead, append "24" to the end of the EMI P/N.

EMI Filter Company 12750 59th Way N. Clearwater, FL 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		FILTER, EMI, MINIATURE, 2-56 THREADED BODY		
FSCM NO.	DWG NO.	REV		
	B2C103A REV C	C		