
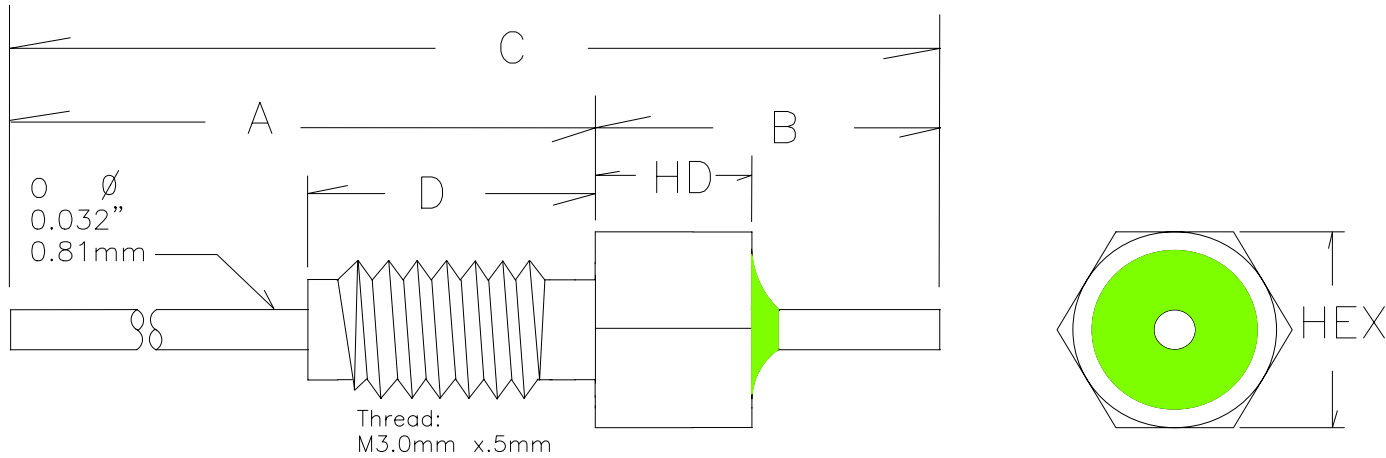


M3.0mm x .5mm THREADED GROUND POINTS

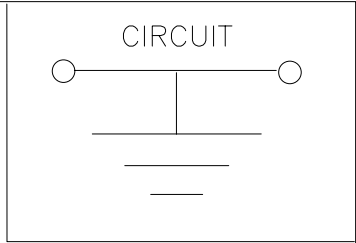

*RoHS Compliant * ISO 9001:2008 Registered*

EMI P/N	FINISH	A		B		C		D		HD		HEX/R	
		Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
M3GND	Silver	.315"	8.00	.225"	5.71	.540"	13.71	.140"	3.55	.075"	1.90	.125"	3.17 Hex
M4GND	Silver	.395"	10.03	.265"	6.73	.660"	16.76	.220"	5.59	.120"	3.05	.187"	4.75 Hex

MATERIAL AND FINISH:
CASE: C12L14 CRS
LEAD: Copper (1/2 Hard)
FINISH: Silver per QQ-S-365

DIMENSION TOLERANCE:
CASE LENGTH: +/- .010" (.250mm)
LEAD LENGTH: +/- .030" (.762mm)
LEAD DIAMETER: +/- .002" (.051mm)

OPERATING TEMP: -55° C to +125° C
INSTALLATION TEMP: N/A
MAXIMUM MOUNTING TORQUE: 2.0 in*lbs

RATED DC CURRENT: 10 A

EMI FILTER COMPANY
12750 59th WAY NORTH
CLEARWATER, FLORIDA 33760

(727) 585-7990
(727) 586-5138 Fax

www.emifiltercompany.com

EMI PART NUMBER: M3.0 x .5mm
SERIES GROUND POINTS

FSCM NO.

OR9L0

DWG NO.

M3GNDs REVC

REV

OR

SCALE:
NTS