


MOUNTING HOLE(S):


IF PRESSING IN:  
0.1405"  $\pm$  0.001"

IF SOLDERING IN:  
0.144"  $\pm$  0.001"  
(FINISHED - PLATED DIMENSION)

# PRESS-IN TYPE GROUND POINTS

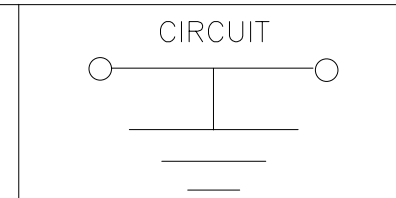

**PATENTED**  
6 898 822  
6 918 617

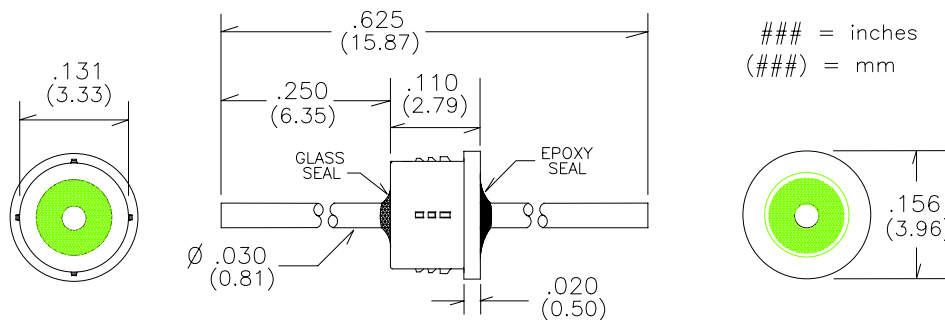

\* RoHS Compliant  
\* ISO 9001:2008 Registered

PART NUMBER	EMI P/N	CAP. (pF)	COLOR DOT(S)	MAX. WVDC	DC AMPS	MINIMUM NO LOAD INSERTION LOSS				
						1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
PZGND		0	NONE	200	10	-	-	-	-	-

ELECTRICAL

PHYSICAL

IDENTIFICATION & LIMITS

MAXIMUM CURRENT: 10ADC

DIMENSION TOLERANCE:

CASE LENGTH:  $\pm$  .010" (.250mm)  
LEAD LENGTH:  $\pm$  .030" (.762mm)  
LEAD DIAMETER:  $\pm$  .002" (.051mm)

MATERIAL AND FINISH:

CASE: C12L14 CRS  
LEAD: Alloy 52  
FINISH: GOLD per MIL-G-45204  
TYPE III, GRADE A, CLASS 1

OPERATING TEMP: -55 °C to +125 °C  
INSTALLATION TEMPERATURE:  
(If Soldered) 225 °C - 250 °C

VENDOR:  
EMI FILTER COMPANY  
12750 59th Way N.  
Clearwater, FL 33760  
(727) 585-7990  
(727) 586-5138 FAX  
www.emifiltercompany.com

EMI PART NUMBER:  
Press-In Feed-Throughs

FSCM NO. OR9LO	DWG NO. PressInGNDs REVC	REV C
-------------------	-----------------------------	----------