
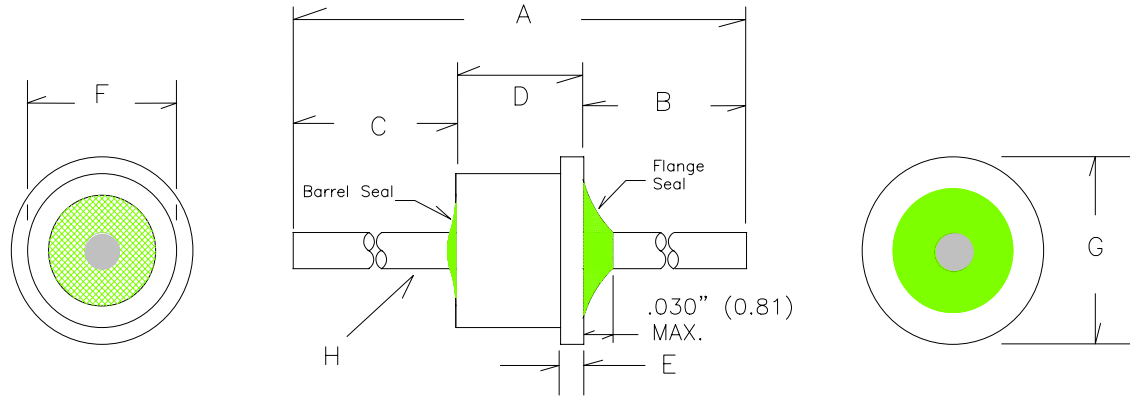


SOLDER-IN GROUND POINTS HERMETIC & NON-HERMETIC

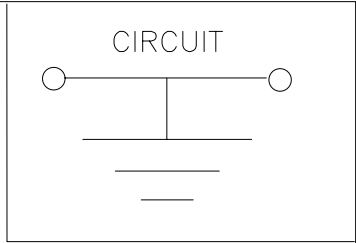

Hermetic (glass) seal may not be green. Green epoxy used opposite of hermetic seal.

EMI P/N	HERMETIC SEAL (Location)	FINISH	A		B		C		D		E		F		G		H	
			Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm		
ZPGND	NO ***	Silver	.625"	15.87	.265"	6.73	.250"	6.35	.110"	2.79	.020"	0.50	.128"	3.25	.156"	3.96	.030"	.762
ZRGND	YES (Flange)	Gold	.625"	15.87	.265"	6.73	.250"	6.35	.110"	2.79	.020"	0.50	.128"	3.25	.156"	3.96	.030"	.762
ZSGND	YES (Barrel)	Gold	.625"	15.87	.265"	6.73	.250"	6.35	.110"	2.79	.020"	0.50	.128"	3.25	.156"	3.96	.030"	.762
XSGND	YES (Barrel)	Gold	.500"	12.70	.200"	5.08	.200"	5.08	.100"	2.54	.008"	0.20	.105"	2.67	.125"	3.18	.020"	0.50

MATERIAL AND FINISH:

CASE: C12L14 CRS
LEAD: Alloy 52
FINISH: GOLD per MIL-G-45204
TYPE II, CLASS 1 (std)
SILVER per QQ-S-365

DIMENSION TOLERANCE:

CASE LENGTH: +/- .010" (.250mm)
LEAD LENGTH: +/- .030" (.762mm)
LEAD DIAMETER: +/- .002" (.051mm)

IDENTIFICATION & LIMITS

MARKING: Green epoxy opposite of glass seal.
OPERATING TEMP: -55°C to +125°C
INSTALLATION TEMPERATURE: 225°C - 250°C

*** Non-certified glass seal may be used on non-hermetic parts.

MAXIMUM CURRENT: 10A DC

*RoHS Compliant * ISO 9001:2008 Registered*

EMI FILTER COMPANY 12750 59th WAY NORTH CLEARWATER, FLORIDA 33760 (727) 585-7990 (727) 586-5138 Fax www.emifiltercompany.com		EMI PART NUMBER: SOLDER-IN GROUND POINTS	
FSCM NO. OR9L0	DWG NO. SOLDERINGNDs REVC	REV C	
SCALE: NTS			